


Company Switch

60A., 120/208V., Posi-Lok™ and Connection Chamber

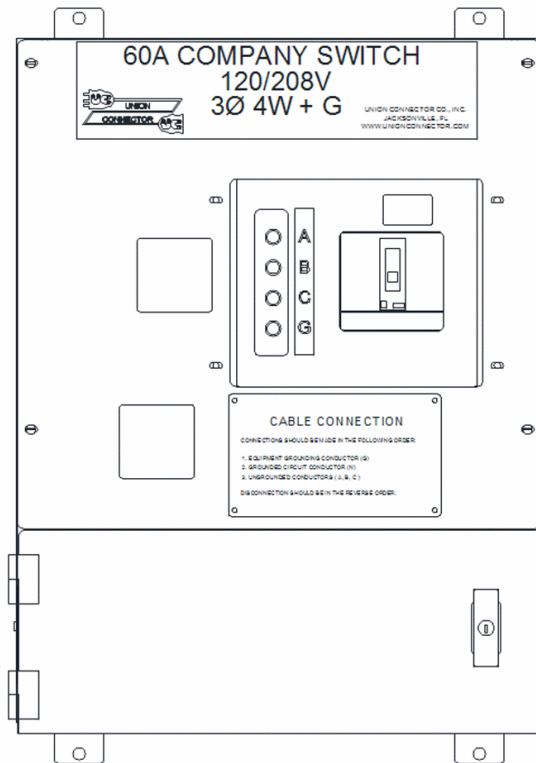

- Electric power distribution center for theatre, convention centers, arenas and events centers
- 200A. Posi-Lok™ receptacle panel
- Sequential interlocking type of receptacle panel
- 60A. Main breaker rated 65K AIC
- Connection chamber for bare-end cables. Door is electrically interlocked with main breaker shunt trip
- Options:
 - ✧ Dual neutral
 - ✧ Parallel sets of receptacles
 - ✧ Isolated Ground
 - ✧ 1Ø - 120V., 120/240V.,
 - ✧ 3Ø - 277/480V., 208V., 480V.
 - ✧ Digital Meter
 - ✧ Custom color finish
 - ✧ Recessed or Pad mounting
 - ✧ Type 3R, 4 or 4X enclosure

Catalog Number: CSC-0610-PSP

Product Type: Company Switch with Posi-Lok™ receptacle panel and connection chamber

Main Enclosure: TYPE 1, Steel, black wrinkled powder-coat finish, wall mounting brackets. Hinged access door to connection chamber, with lockable handle. Electrical interlock on door shall activate shunt trip in breaker when door is opened.

Cable Entry: Grommeted holes in bottom of enclosure for portable bare-end cable entry.

Dimensions: 28"H. x 21"W. x 8¾" D.

Rating: 60A., 120/208V., 3Ø, 4W+G

Circuit Breakers: Molded-case, UL489, 65K AIC @ 240V.,
(1) 60A., 3-pole with shunt trip interlocked with connection chamber door

Receptacles: 200A. Posi-Lok™ receptacle panel

Busbar Output: (5) dual rated mechanical lugs on copper bus accessible in connection chamber

Monitoring: LED Indicator lights to indicate presence of phase voltage.

Labelling: Laser engraved cam identifiers and panel rating. Cable connection warning label per NEC Art 520.

Listing: UL Listed

Union Connector Co., Inc.
Jacksonville, FL 32256
631-753-9550

