


Company Switch

100A., 120/208V., IEC 309 Pin & Sleeve and Connection Chamber

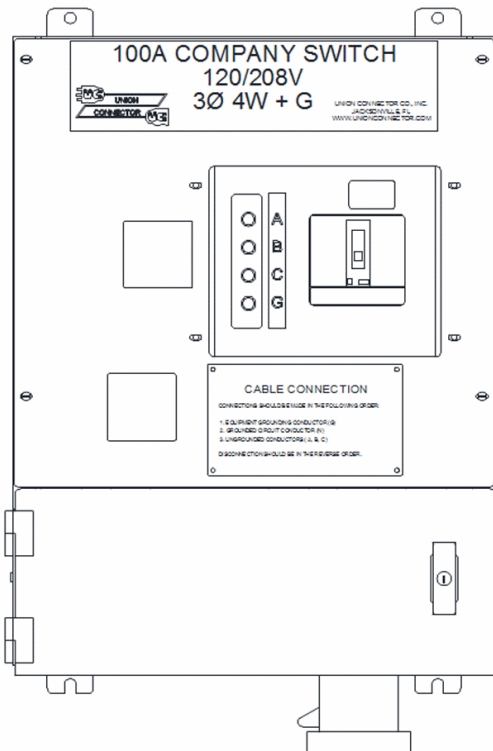

- Electric power distribution center for theatre, convention centers, arenas and events centers
- 100A. IEC 309 Pin & Sleeve receptacle
- Standard power connector for audio/technical application
- 100A. Main breaker rated 65K AIC
- Connection chamber for bare-end cables. Door is electrically interlocked with main breaker shunt trip
- Options:
 - ✦ Parallel sets of receptacles
 - ✦ Isolated Ground
 - ✦ 1Ø - 120V., 120/240V.,
 - ✦ 3Ø - 277/480V., 208V., 480V.
 - ✦ Digital Meter
 - ✦ Custom color finish
 - ✦ Recessed or Pad mounting
 - ✦ Type 3R, 4 or 4X enclosure

- Catalog Number:** CSC-1010-ISP
- Product Type:** Company Switch with IEC 309 Pin & Sleeve and connection chamber
- Main Enclosure:** TYPE 1, Steel, black wrinkled powder-coat finish, wall mounting brackets .Hinged access door to connection chamber, with lockable handle. Electrical interlock on door shall activate shunt trip in breaker when door is opened.
- Cable Entry:** Grommeted holes in bottom of enclosure for portable bare-end cable entry.
- Dimensions:** 28”H. x 21”W. x 8¾” D.
- Rating:** 100A., 120/208V., 3Ø, 4W+G
- Circuit Breakers:** Molded-case, UL489, 65K AIC @ 240V.,
(1) 100A., 3-pole with shunt trip interlocked with connection chamber door
- Receptacles:** 100A. IEC 309 Pin & Sleeve
- Busbar Output:** (5) dual rated mechanical lugs on copper bus accessible in connection chamber
- Monitoring:** LED Indicator lights to indicate presence of phase voltage.
- Labelling:** Laser engraved cam identifiers and panel rating. Cable connection warning label per NEC Art 520.
- Listing:** UL Listed