




## Multiple Breaker Company Switch with Receptacles

### Features

- 200A – 800A (standard)
- UL Listed
- Type 1 enclosure
- Black powder coated scratch resistant finish
- 65k AIC @ 240V. molded case circuit breakers
- Standard rating – 3Ø 120/208V.
- Industry standard receptacles:
  - Series 16 Cam
  - SafeCam®
- Phase voltage and Ground indicator lights
- Wire bending space as required by the NEC

### Options

- Dual Neutral receptacles ( 200% )
- Reverse Neutral ( Series 16 and SafeCam® only )
- Reverse Ground ( Series 16 and SafeCam® only )
- Parallel sets of receptacles
- Pin & Sleeve ( IEC 309) receptacles
- Posi-Lok™ receptacles
- Isolated Ground
- Service entrance rating
- 1Ø 120V, 1Ø 120/240V.
- 3Ø 277/480V., 3Ø 208V., 3Ø 480V.
- Utility and Motor Branch circuits
- Digital Meter
- Fire Alarm Connection
- Custom laser engraved labeling
- Custom color
- Recessed, in-wall, mounting enclosure
- Pad / Freestanding enclosure
- Aluminum enclosure construction
- Type 3R construction (see Multi-Breaker Outdoor Switches)
- Type 4 construction (see Multi-Breaker Outdoor Switches)
- Type 4X construction (see Multi-Breaker Outdoor Switches)

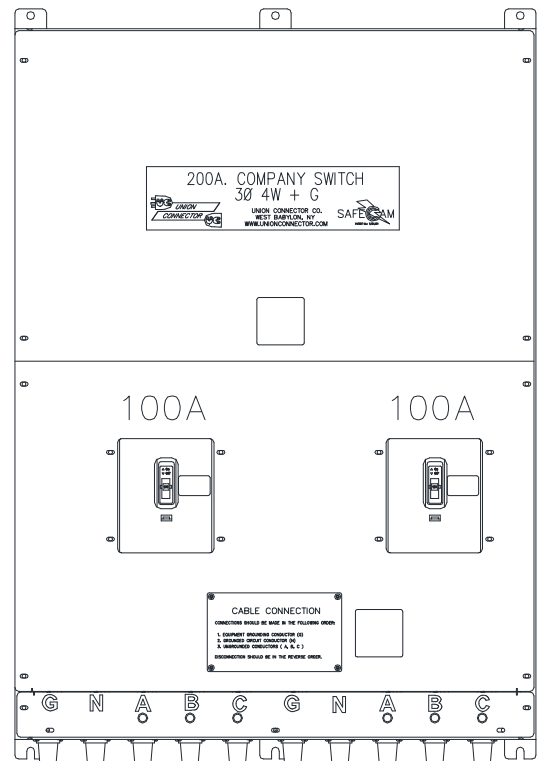



## **Multiple Breaker Company Switch with Receptacles**

### **Specifications**

1. The enclosure shall be Type 1, fabricated from 14 Ga. cold rolled steel, and finished with a scratch resistant black wrinkle powder coat.
3. The enclosure shall be provided with (6) surface mounting tabs on 16" centers.
4. The dead front cover of the enclosure shall contain a window with a recessed panel that exposes the circuit breaker handles. The top of the circuit breaker handles shall be below the plane of the cover.
5. Conduit entry shall be through the top of the enclosure and the building wire shall terminate to mechanical lugs on the line bus, neutral bus and ground bus. Copper conductors shall connect Line bus to each branch breaker.
6. The mechanical lugs shall be dual rated (Al/Cu) and accommodate the building conductors as listed:

Amps	Phase	Neutral	Ground
200	#6AWG – 300kcmil	#6AWG – 300kcmil	#14AWG - 2/0AWG
400	#4AWG - 600kcmil	#4AWG - 600kcmil	#14AWG - 2/0AWG
600	(2)#4AWG – (2)600kcmil	(2)#4AWG – (2)600kcmil	#14AWG - 2/0 AWG
800	(2)#4AWG – (2)600kcmil	(2)#4AWG – (2)600kcmil	#14AWG - 2/0 AWG
7. The circuit breakers shall be 3-pole, UL Listed 489 molded case type, with a current interrupt rating of 65k AIC @ 240V.
8. All connections from the circuit breakers to the receptacles shall be copper conductors.
9. When Series 16 Cam receptacles are provided:
  - a. Series 16 receptacles shall be, color coded, and mounted on the receptacle panel at bottom of the enclosure.
  - b. Series 16 receptacles shall be protected by color coded snap back cover when they are not in use.
10. When SafeCam<sup>®</sup> receptacles are provided:
  - a. SafeCam<sup>®</sup> receptacles shall be color coded, and mounted on the receptacle panel at bottom of the enclosure.
  - b. The SafeCam<sup>®</sup> system shall monitor the receptacles and open the main circuit breaker if a plug is removed from a receptacle or, if the main circuit breaker is closed while a receptacle is exposed (i.e. no plug or dummy plug inserted)
  - c. A set of color-coded Series 16 “dummy” plugs shall be mechanically fastened to the receptacle panel.
11. The receptacle panel shall contain slots between the receptacles to eliminate hysteresis, as required by the NEC
12. Red LED indicator lights shall be provided to show voltage present at each phase receptacle and green LEDs shall be provided to show Ground integrity of the enclosure.
13. A warning label to specify the proper sequence for connection and removal of portable cable shall be mechanically fastened to the dead front cover, above the series 16 receptacles, as required by NEC
14. The Company Switch shall have the option to be rated as service entrance equipment.
15. The Company Switch shall meet or exceed all applicable NEC standards and shall be UL Listed. A label denoting the UL Listing shall be permanently affixed to the unit.
16. The Company Switch shall be a PBS model as manufactured by Union Connector.



## Multiple Breaker Company Switch with Receptacles

<b>Standard Models</b>					
CATALOG NUMBER	PART NUMBER	FEED AMPACITY	BRANCH BREAKER No. 1	BRANCH BREAKER No. 2	RECEPTACLE TYPE
Contact Factory	CSDC-20B12-CL	200A.	100A.	100A.	Series 16 Cam
Contact Factory	CSDC-40B22-CL	400A.	200A.	200A.	Series 16 Cam
Contact Factory	CSDC-60B4121-CL	600A.	400A.	200A.	Series 16 Cam
Contact Factory	CSDC-80B42-CL	800A.	400A.	400A.	Series 16 Cam
Contact Factory	CSDC-20B12-SC	200A.	100A.	100A.	Safe Cam®
Contact Factory	CSDC-40B22-SC	400A.	200A.	200A.	Safe Cam®
Contact Factory	CSDC-60B4121-SC	600A.	400A.	200A.	Safe Cam®
Contact Factory	CSDC-80B42-SC	800A.	400A.	400A.	Safe Cam®

### Part Number

*Example: Multiple Breaker Company Switch with connection chambers, 400A. feed with (2) 200A. Branch Breakers, SafeCam® receptacles, NEMA 1 enclosure, Voltage rating 120/208V., with no other options*

#### Cat # CSDC-40B22-SC

**CSDC - 40 - B - 2      2      (blank) (blank) - SC - (blank) - (blank) - (blank) - (blank) - (blank)**  
 Product Feed Input Breaker1 Breaker1 Breaker2 Breaker2 Receptacle Receptacle Mounting Enclosure Voltage Options  
 Amps Amps Amps Qty. Amps Qty. Type Options

