


Multiple Breaker Company Switch

Main Bus with Receptacles and Connection Chambers

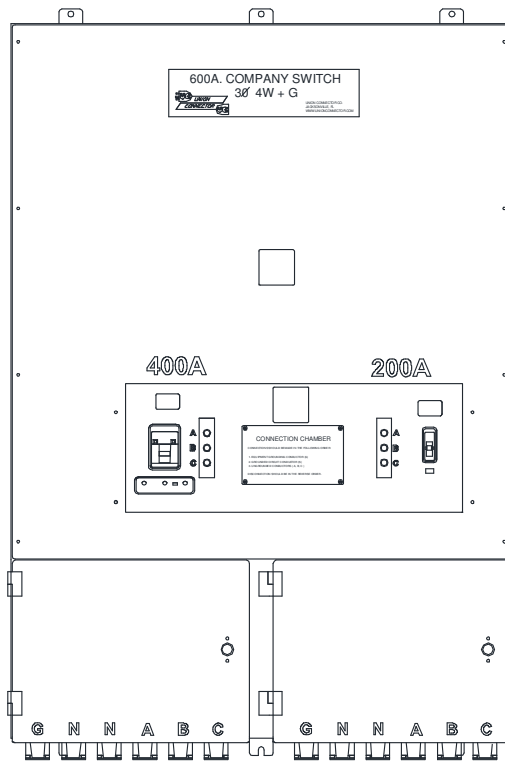

- Electric power distribution center for theatre, convention centers, arenas, schools, churches, and events centers
- Main bus feeds branch breakers
- (2) sets of Series 16 Cam receptacles or (2) sets of SafeCam® receptacles
- (2) Branch breaker rated 65K AIC
- (2) Connection chambers with strain reliefs for bare-end cables. Each door is electrically interlocked with branch breaker shunt trip.
- Options:
 - ✧ More than (2) Branch Circuits
 - ✧ Parallel sets of receptacles
 - ✧ Isolated Ground
 - ✧ 1Ø - 120V., 120/240V.,
 - ✧ 3Ø - 277/480V., 208V., 480V.
 - ✧ Posi-Lok™ receptacles
 - ✧ Pin & Sleeve (IEC309) receptacles
 - ✧ Digital Meter
 - ✧ Fire Alarm connection
 - ✧ Custom color finish
 - ✧ Recessed or Pad mounting
 - ✧ Type 3R, 4 or 4X enclosure

Catalog Number: Varies – dependent on receptacle type and breaker ampacities. See Product Bulletin PBF-401 for details (CSDC-60B4121-CSP shown in illustration).

Product Type: Multiple Breaker Company Switch with receptacles and connection chambers

Main Enclosure: TYPE 1, Steel, black wrinkled powder-coat finish, wall mounting brackets.

Dimensions: Consult factory

Rating: 120/208V., 3Ø, 4W+G - Standard –(see Options for other available ratings)

Circuit Breakers: Molded-case, UL489, 65K AIC @ 240V.,
(2) 3-pole with shunt trip interlocked with connection chamber door

Receptacles: (2) sets of UL Listed panel mount receptacles (Series 16 Cam or SafeCam®).

Monitoring: LED Indicator lights to indicate presence of phase voltage.

Labelling: Laser engraved cam identifiers and panel rating. Cable connection warning label per NEC Art 520.

Listing: UL Listed

Union Connector Co., Inc.
Jacksonville, FL 32256
631-753-9550

