


# Multiple Breaker Company Switch

## Main Breaker, Receptacles and Connection Chambers

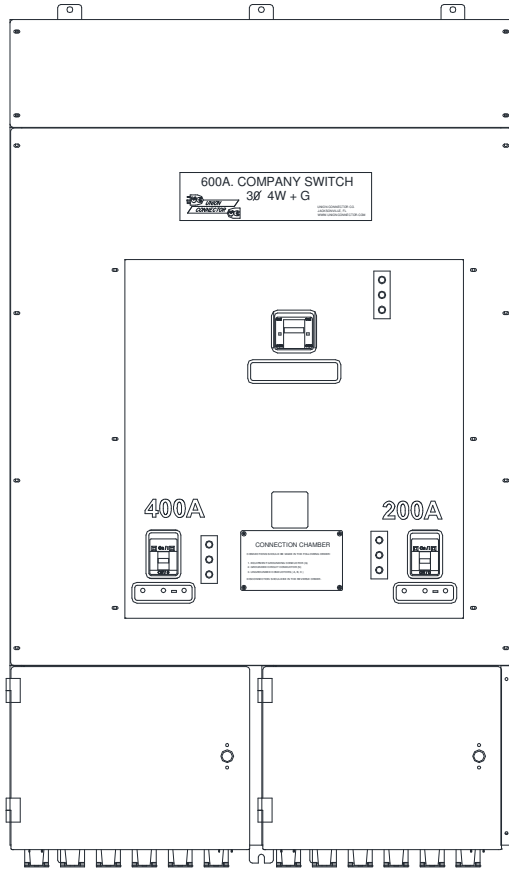

- Electric power distribution center for theatre, convention centers, arenas, schools, churches, and events centers
- Main breaker feeds branch breakers
- (2) sets of Series 16 Cam receptacles  
or  
(2) sets of SafeCam® receptacles
- (2) Branch breaker rated 65K AIC
- (2) Connection chambers with strain reliefs for bare-end cables. Each door is electrically interlocked with branch breaker shunt trip.
- Options:
  - ✦ More than (2) Branch Circuits
  - ✦ Parallel sets of receptacles
  - ✦ Isolated Ground
  - ✦ 1Ø - 120V., 120/240V.,
  - ✦ 3Ø - 277/480V., 208V., 480V.
  - ✦ Posi-Lok™ receptacles
  - ✦ Pin & Sleeve (IEC309) receptacles
  - ✦ Digital Meter
  - ✦ Fire Alarm connection
  - ✦ Custom color finish
  - ✦ Recessed or Pad mounting
  - ✦ Type 3R, 4 or 4X enclosure

**Catalog Number:** Varies – dependent on receptacle type and breaker ampacities. See Product Bulletin PBF-421 for details. ( CSDC-60M4121-CSP shown in illustration ).

**Product Type:** Multiple Breaker Company Switch with Main breaker, receptacles and connection chambers

**Main Enclosure:** TYPE 1, Steel, black wrinkled powder-coat finish, wall mounting brackets.

**Dimensions:** Consult factory

**Rating:** 120/208V., 3Ø, 4W+G - Standard –( see Options for other available ratings )

**Circuit Breakers:** Molded-case, UL489, 65K AIC @ 240V.,  
(1) 3-pole Main breaker  
(2) 3-pole Branch breakers with shunt trip interlocked with connection chamber door

**Receptacles:** (2) sets of UL Listed panel mount receptacles ( Series 16 Cam or SafeCam® ).

**Monitoring:** LED Indicator lights to indicate presence of phase voltage.

**Labelling:** Laser engraved cam identifiers and panel rating. Cable connection warning label per NEC Art 520.

**Listing:** UL Listed