


Company Switch

60A., 120/208V., Series 16 SafeCam®

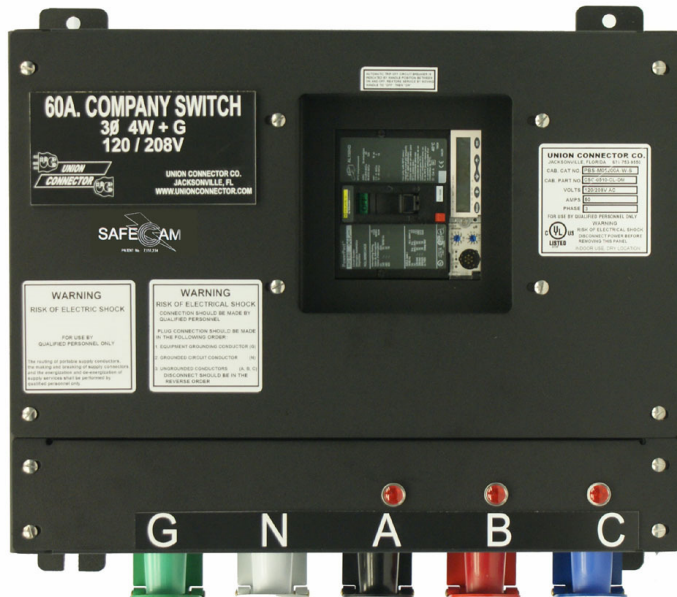

Dummy Plugs Not Shown

- Electric power distribution center for theatre, convention centers, arenas, schools, churches, and events centers
- Series 16 SafeCam® receptacles
- 60A. Main breaker rated 65K AIC containing an integral shunt trip
- SafeCam® system monitors receptacles and activates shunt trip whenever a plug is disconnected from a receptacle
- Latest version of the world's first UL Listed Company Switch that was designed in 1986 by Union Connector
- Options:
 - ✧ Dual neutral
 - ✧ Parallel sets of receptacles
 - ✧ Isolated Ground
 - ✧ Reverse Neutral / Ground
 - ✧ 1Ø - 120V., 120/240V.,
 - ✧ 3Ø - 277/480V., 208V., 480V.
 - ✧ Digital Meter
 - ✧ Custom color finish
 - ✧ Recessed or Pad mounting
 - ✧ Type 3R, 4 or 4X enclosure

- Catalog Number:** CSC-0610-SC
- Product Type:** Company Switch with Series 16 SafeCam® receptacles
- Main Enclosure:** TYPE 1, Steel, black wrinkled powder-coat finish, wall mounting brackets.
- Dimensions:** 15 ½" H. x 18"W. x 6 ½" D.
- Rating:** 60A., 120/208V., 3Ø, 4W+G
- Circuit Breakers:** Molded-case, UL489, 65K AIC @ 240V.,
(1) 60A., 3-pole with shunt trip
- Receptacles:** (5) Series 16 SafeCam® panel mount color coded receptacles with dummy plugs.
- Monitoring:** LED Indicator lights to indicate presence of phase voltage.
- Labelling:** Laser engraved cam identifiers and panel rating. Cable connection warning label per NEC Art 520.
- Listing:** UL Listed

Union Connector Co., Inc.
Jacksonville, FL 32256
631-753-9550

