


Company Switch

100A., 120/208V., Series 16 SafeCam®

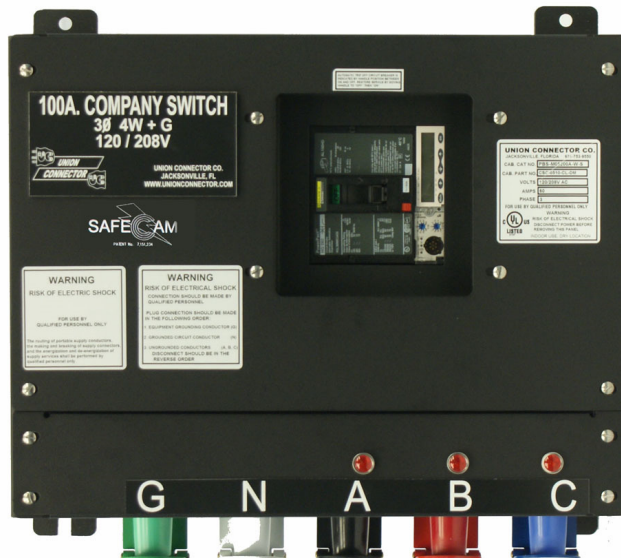

Dummy Plugs Not Shown

- Electric power distribution center for theatre, convention centers, arenas, schools, churches, and events centers
- Series 16 SafeCam® receptacles
- 100A. Main breaker rated 65K AIC containing an integral shunt trip
- SafeCam® system monitors receptacles and activates shunt trip whenever a plug is disconnected from a receptacle
- Latest version of the world's first UL Listed Company Switch that was designed in 1986 by Union Connector
- Options:
 - ✧ Dual neutral
 - ✧ Parallel sets of receptacles
 - ✧ Isolated Ground
 - ✧ Reverse Neutral / Ground
 - ✧ 1Ø - 120V., 120/240V.,
 - ✧ 3Ø - 277/480V., 208V., 480V.
 - ✧ Digital Meter
 - ✧ Custom color finish
 - ✧ Recessed or Pad mounting
 - ✧ Type 3R, 4 or 4X enclosure

Catalog Number:	CSC-1010-SC
Product Type:	Company Switch with Series 16 SafeCam® receptacles
Main Enclosure:	TYPE 1, Steel, black wrinkled powder-coat finish, wall mounting brackets.
Dimensions:	24"H. x 18"W. x 6 1/2" D.
Rating:	100A., 120/208V., 3Ø, 4W+G
Circuit Breakers:	Molded-case, UL489, 65K AIC @ 240V., (1) 100A., 3-pole with shunt trip
Receptacles:	(5) Series 16 SafeCam® panel mount color coded receptacles.
Monitoring:	LED Indicator lights to indicate presence of phase voltage.
Labelling:	Laser engraved cam identifiers and panel rating. Cable connection warning label per NEC Art 520.
Listing:	UL Listed

Union Connector Co., Inc.
Jacksonville, FL 32256
631-753-9550

