


Multiple Breaker Company Switch

Main Breaker with Receptacles

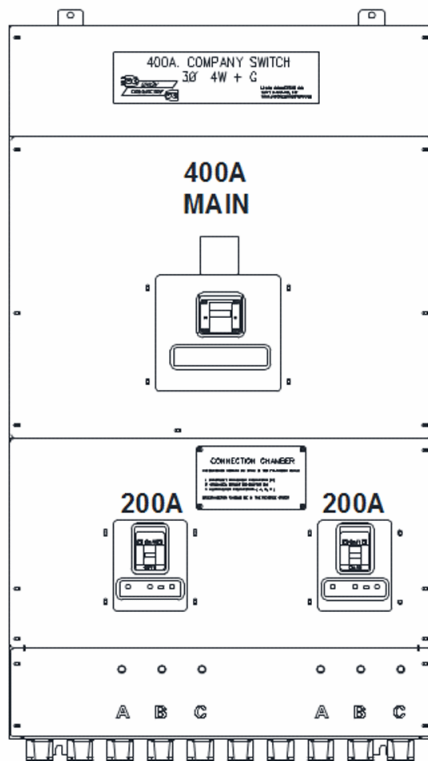

- Electric power distribution center for theatre, convention centers, arenas, schools, churches, and events centers
- Main breaker feeds branch breakers
- (2) sets of Series 16 Cam receptacles or (2) sets of SafeCam® receptacles
- (2) Branch breaker rated 65K AIC
- Options:
 - ✦ More than (2) Branch Circuits
 - ✦ Parallel sets of receptacles
 - ✦ Isolated Ground
 - ✦ 1Ø - 120V., 120/240V.,
 - ✦ 3Ø - 277/480V., 208V., 480V.
 - ✦ Posi-Lok™ receptacles
 - ✦ Pin & Sleeve (IEC309) receptacles
 - ✦ Digital Meter
 - ✦ Fire Alarm connection
 - ✦ Custom color finish
 - ✦ Recessed or Pad mounting
 - ✦ Type 3R, 4 or 4X enclosure

- . Catalog Number:** *Varies – dependent on receptacle type and breaker ampacities. See Product Bulletin PBF-321 for details. (CSDC-40M22-CL shown in illustration).*
- Product Type:** *Multiple Breaker Company Switch with bus and receptacles*
- Main Enclosure:** *TYPE 1, Steel, black wrinkled powder-coat finish, wall mounting brackets.*
- Dimensions:** *Consult factory*
- Rating:** *120/208V., 3Ø, 4W+G - Standard –(see Options for other available ratings)*
- Circuit Breakers:** *Molded-case, UL489, 65K AIC @ 240V.,
(1) 3-pole Main breaker
(2) 3-pole Branch breakers*
- Receptacles:** *(2) sets of UL Listed panel mount receptacles (Series 16 Cam or SafeCam®).*
- Monitoring:** *LED Indicator lights to indicate presence of phase voltage.*
- Labelling:** *Laser engraved cam identifiers and panel rating. Cable connection warning label per NEC Art 520.*
- Listing:** *UL Listed*