


# Generator Connection Box

## 3200A., Series 16 Cam Inlets

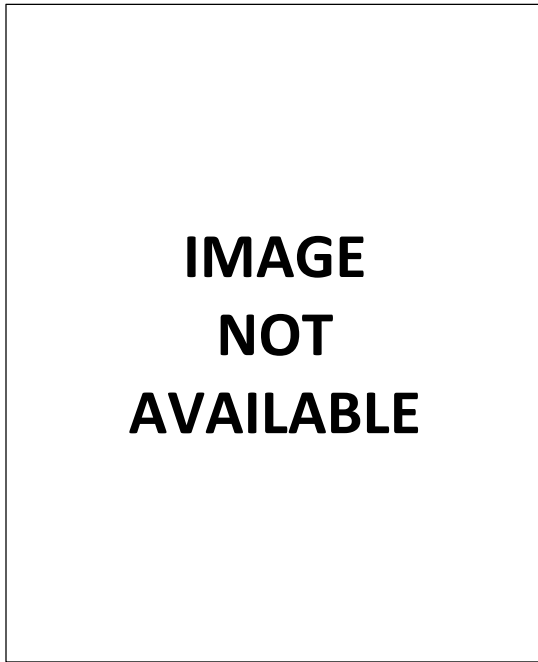

Typical 3Ø 277/480V. Model: GCP-N-0-5-3200-1-1-1-3-0

- Outdoor rated Type 3R input panel for portable generator hookup.
- Designed for use in waste treatment, community centers, gas stations, hospitals, fire / police stations and other facilities requiring portable power during utility outages.
- Direct connection of generator cable to facility via Series 16 Cam connectors.
- Hinged door on bottom provides portable cable access to Type 3R enclosure.
- Options:
  - ✦ Recessed or Pad mounting
  - ✦ Type 4X enclosure
  - ✦ Aluminum Enclosure
  - ✦ Main Circuit Breaker
  - ✦ Posi-Lok™ input panel
  - ✦ Mechanical Lug input connection
  - ✦ Phase sequence meter

**Enclosure:** TYPE 3R , Galvanized Steel, ANSI 61 Grey powder-coat finish, surface mount w/mounting tabs, and hinged front door with continuous hinge and locking hasp. Hinged door on bottom of enclosure for portable cable entry, with lock access inside enclosure. Cable connectors remain inside enclosure when connected to inlets.

**Dimensions:** 36”H. x 30”W. x 28” D.

**Building Connection:** Phase/Neutral direct mechanical lugs mounted on inlet bus. Ground direct to enclosure ground stud.

Part Number																		
GCP	-	N	-	0	-	5	-	3200	-	1	-	1	-	1	-	3	-	0
Product		Type		Switch		Voltage		Amps		Connection		Neutral		Enclosure		Options		Custom
Generator Connection Box		N = Non Switching		0 = No Switch		1 = 120V., Single Ø, 2W+G 2 = 120/240V., Single Ø, 3W+G 3 = 120/208V., Three Ø, 4W+G 4 = 208V., Three Ø, 3W+G 5 = 277/480V., Three Ø, 4W+G 6 = 480V., Three Ø, 3W+G		3200		0 = Mechanical lugs 1 = Cams (all Male) 2 = Bus bar w/bolt holes.) 5 = Posi-Lok™ (all Male)		0 = No Neutral 1 = Single Neutral 2 = Dual Neutral		0 = Type 1 (Wall Mount) 1 = 3R (Wall Mount) 3 = 4X (Wall Mount) 4 = 3R (Pad Mount) 6 = 4X (Pad Mount)		0 = No Options 1 = Phase sequence meter 2 = Compression lug for building wire connection 3 = Snap-back Covers 4 = Kirk Keys 5 = Aluminum Enclosure 6 = Main Circuit Breaker		(Suffix assigned by factory) 0 = No customization